

SUN



PRODUCT COMPOSITION

EPDM rubber granules, aliphatic PU binder

COLOR COMBINATION

Standard: yellow, white, black

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

safety rubber surface

(no safety area required according to EN1177)

PRODUCT SAFETY

certified according to EN1176

complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION

the product is glued to SBR | asphalt | concrete base

PACKAGING



wrapped in plastic and delivered

on a pallet 1200 x 1200mm

STORAGE

in original packaging on a pallet

in temperatures between - 40° C and 50° C

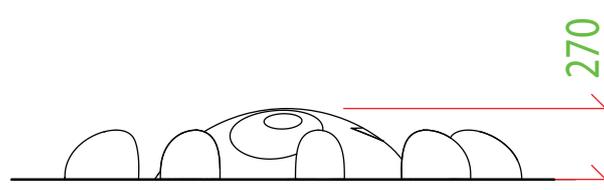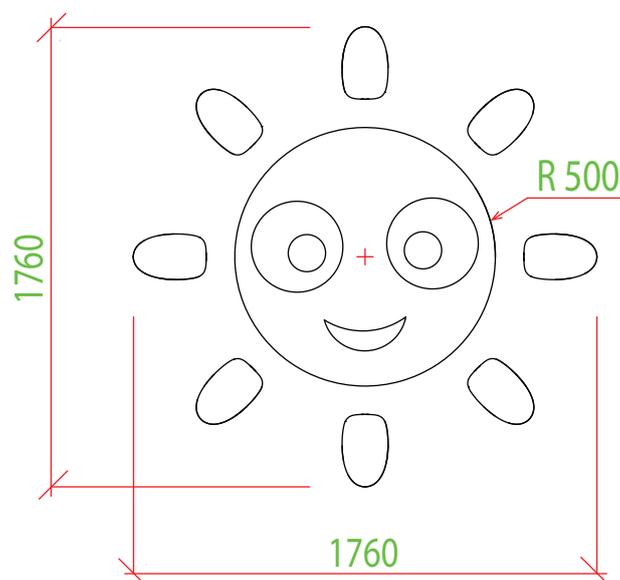

Our products are handmade, please allow dimensional tolerance up to 20 mm

110 kg weight	<600 mm critical fall height	1 hr assembly time	0 - 8 yrs users' age	1 max. number of users	1760 x 1760 x 270 mm dimensions
-------------------------	---	------------------------------	--------------------------------	----------------------------------	---

3D PROGRAM, s.r.o.

Objízdná 1911

Otrokovice 765 02

Czech Republic


www.3dprogram.eu

info@3dprogram.eu

+420 602 500 045 +420 577 700 718



MADE IN EU



3D PROGRAM