product line **CLASSIC**



PRODUCT COMPOSITION

SBR+EPDM rubber granules, aliphatic PU binder, vandal-resistant fiberglass shell, metal parts

COLOR COMBINATION

standard: dark green / black / white (other combination on request)

COLOR STABILITY

UV stable



RECOMMENDED SAFETY SURFACE

safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

certified according to EN1176 complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 1650 x 2100mm


STORAGE

in original packaging on a pallet in temperatures between - 40° C and 50° C

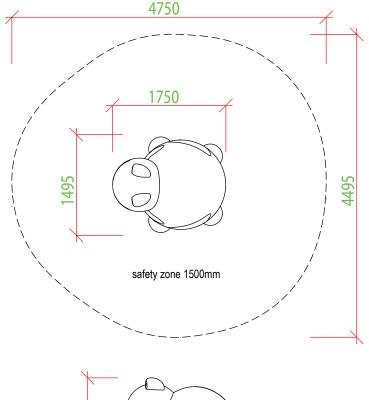

















Objízdná 1911 Otrokovice 765 02 Czech Republic





