



AFNOR Cert. 61477

Ref. MC30072X-BAR

→ 1.1 m height door gates bars infill for handrail



Non contractual picture

The METALU+

- + Custom-made manufacturing
- + Adaptability of the door gate possible on an existing Metalu Plast handrail

Size



	simple		double	
Width of the door gate	1.5 m	2 m	3 m	4 m
Spacing between posts (Sp.) (mm)	1580	2027	3046	3940
Spacing (mm)	1500	1947	2966	3860
Depth of sealing (s) (mm)	400	400	400	400


Technical description

Standard equipment:

- **Simple door gate:**
Width 1.5 m, **Ref. MC300721-BAR** and 2 m, **Ref. MC300722-BAR**
Square hot galvanized steel frame 50 x 50 mm
Barred infill 25 x 25 mm
180° opening and reversible hinges
European barrel lock (Locinox)
- **Double doors gate:**
Width 3 m, **Ref. MC300724-BAR** and 4 m, **Ref. MC300725-BAR**
Hot galvanized steel door gate stop (avoiding a door gate opening in the wrong way) and a vertical stop (limiting the tension on the hinges in case of overcharging)
Steel ground lock
- **Posts:**
Plastic-coated galvanized steel section, 80 x 80 mm
Connections of the handrails using Ø 60 mm connectors

Optional equipment:

- Stopper block for sealed gate, **Ref. MC300688**

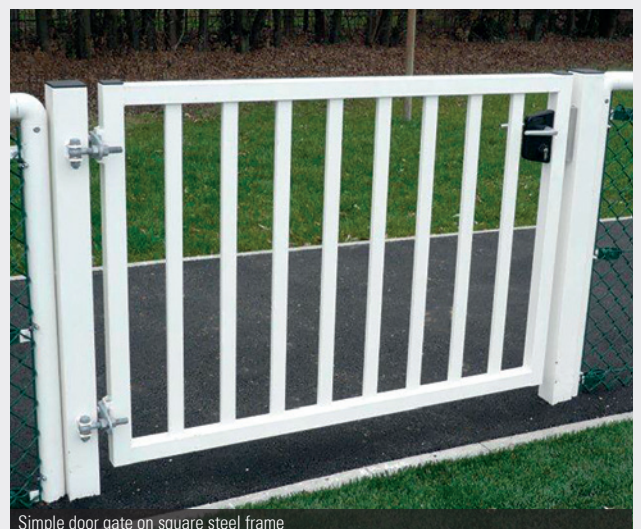

Simple door gate on square steel frame