


→ NetFix Ball-stop

U-clamp system - Full net infill



AFNOR Cert. 61477

Ref. PB111900

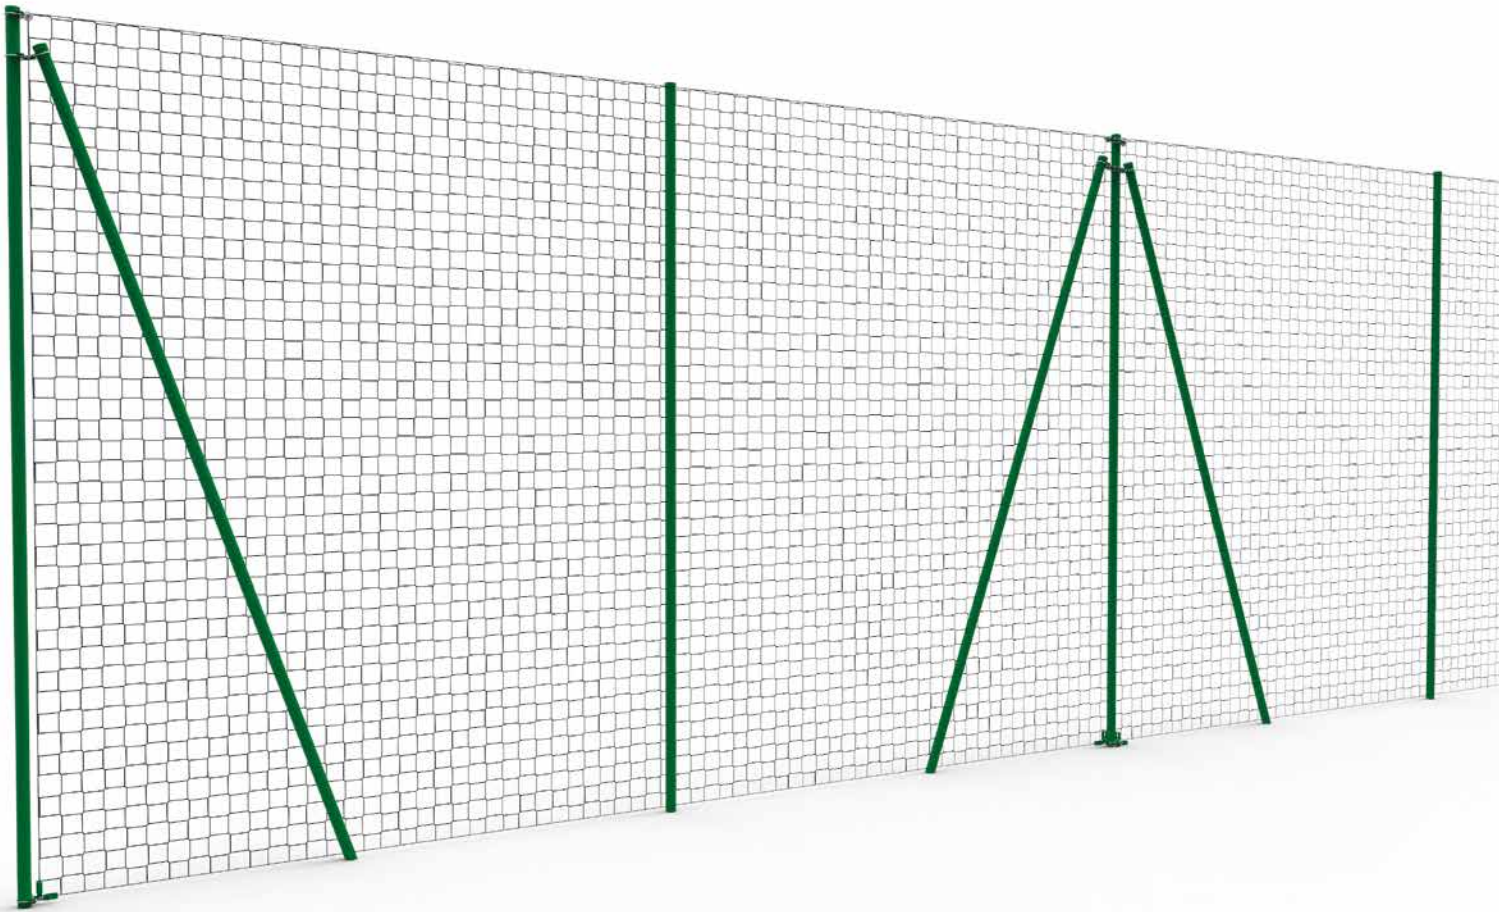

The METALU+

- + **Cost-effective** solution
- + **Antirust** treatment
- + **Anti-UV** treated nets

Non contractual picture

Size

| | |
|----------------------------|----------|
| Height above ground..... | 6 m |
| Depth of sealling..... | 1 m |
| Ø of posts..... | 90 mm |
| Height of net infill | 4 or 6 m |

Technical description

Standard equipment:

- Galvanized steel end posts and straining posts Ø 90 mm plastic-coated green RAL 6005
- Fixing of straining posts and riggings by NetFix system
- Antirust treatment on u-brackets and steel clamps
- Wrap-around PVC cap on all posts
- Cable hanged by hooks
- Full net infill: 6 meter height or 4 meter height infill on upper part
- Mesh 145 mm, PE wire Ø 2,3 mm
- Holds cables with stainless steel wire guides



End post and straining post



NetFix details