

# RECYCLED RC1420



3 - 14 years



18 kids



31,8 m<sup>2</sup>



## Material specification

- The structure is made of a durable, moisture-resistant and low-temperature recycled composite,
- Platforms and climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Climbing stones made of green HDPE plates made of 100% recycled material, e.g. ocean waste such as fishing nets and ropes, resistant to weather conditions,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Ladders made of steel ropes in polypropylene braid and rungs made of synthetic material,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel bars and handrails,
- Stainless steel screws and/or screws covered with plastic caps,



**Physical development**



pull-up



passage






climbing





**9**  
number of activity elements

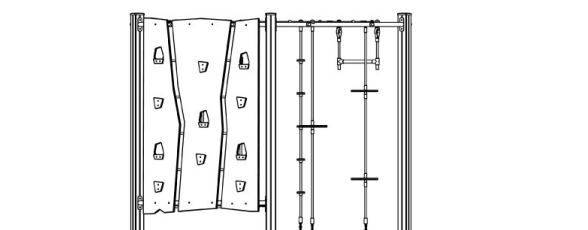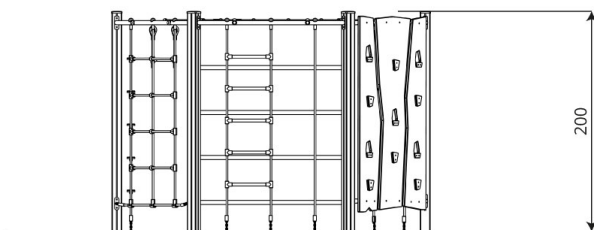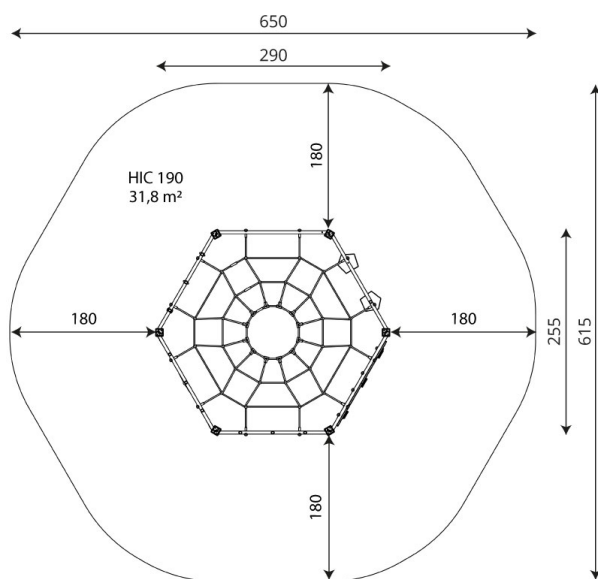

**Product technical sheet**

**RECYCLED RC1420**

**Product data**

|                                |                     |
|--------------------------------|---------------------|
| Length                         | 290 cm              |
| Width                          | 255 cm              |
| Total height                   | 200 cm              |
| Age group                      | 3 - 14 years        |
| Number of users                | 18 kids             |
| Safety zone                    | 31,8 m2             |
| Free fall height               | 190 cm              |
| In accordance with norm EN     | 1176-1:2017+A1:2023 |
| Weight of the heaviest part    | 13 kg               |
| Dimensions of the largest part | 265x9x9 cm          |
| Availability of spare parts    | YES                 |
| Installation time              | 6,5 h               |

Data is subject to change without prior notice.

**Additional information**

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

**Guarantee**

**30** 30 year guarantee - Durability of steel and stainless steel structural elements

**15** 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10** 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5** 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017+A1:2023

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | 190                       |

## Product technical sheet

# RECYCLED RC1420

### Amount of safe surface corresponding with free fall height:

HIC 190 31,8 m<sup>2</sup>

Data is subject to change without prior notice.

